

Activity and Degradation of Carbon Supported Oxynitrides Containing Ultra-low Pt Concentration as Cathode Catalyst for Proton Exchange Membrane Fuel Cells

L. Wang^{a,*}, A. S. Gago^a, and, K. A. Friedrich^{a,b}

^aInstitute of Engineering Thermodynamics, German Aerospace Center (DLR), Pfaffenwaldring 38-40, 70569 Stuttgart, Germany

^bInstitute of Energy Storage, University of Stuttgart, Pfaffenwaldring 31, 70569 Stuttgart, Germany

*E-mail: li.wang@dlr.de

Background

- Cost-effective catalysts with superior stability are required for the massive application of PEMFC.


Materials

- Pt-ON/C: 2 wt% Pt + 80 wt% C; ON, $\text{Co}_{0.4}\text{Mo}_{0.5}\text{O}_x\text{N}_y$;
Pt/C (Etek): 2 wt% Pt/C by mixing with Vulcan XC-72.

Accelerated Stress Test (AST) Protocols

- Lifetime Stability Test (LST):
10000 cycles of CV, 0.6 V – 1.0 V vs. RHE, 50 mV s⁻¹
- Start-up Stability Test (SST):
2000 cycles of CV, 0.6 V – 1.4 V vs. RHE, 50 mV s⁻¹


LST protocol

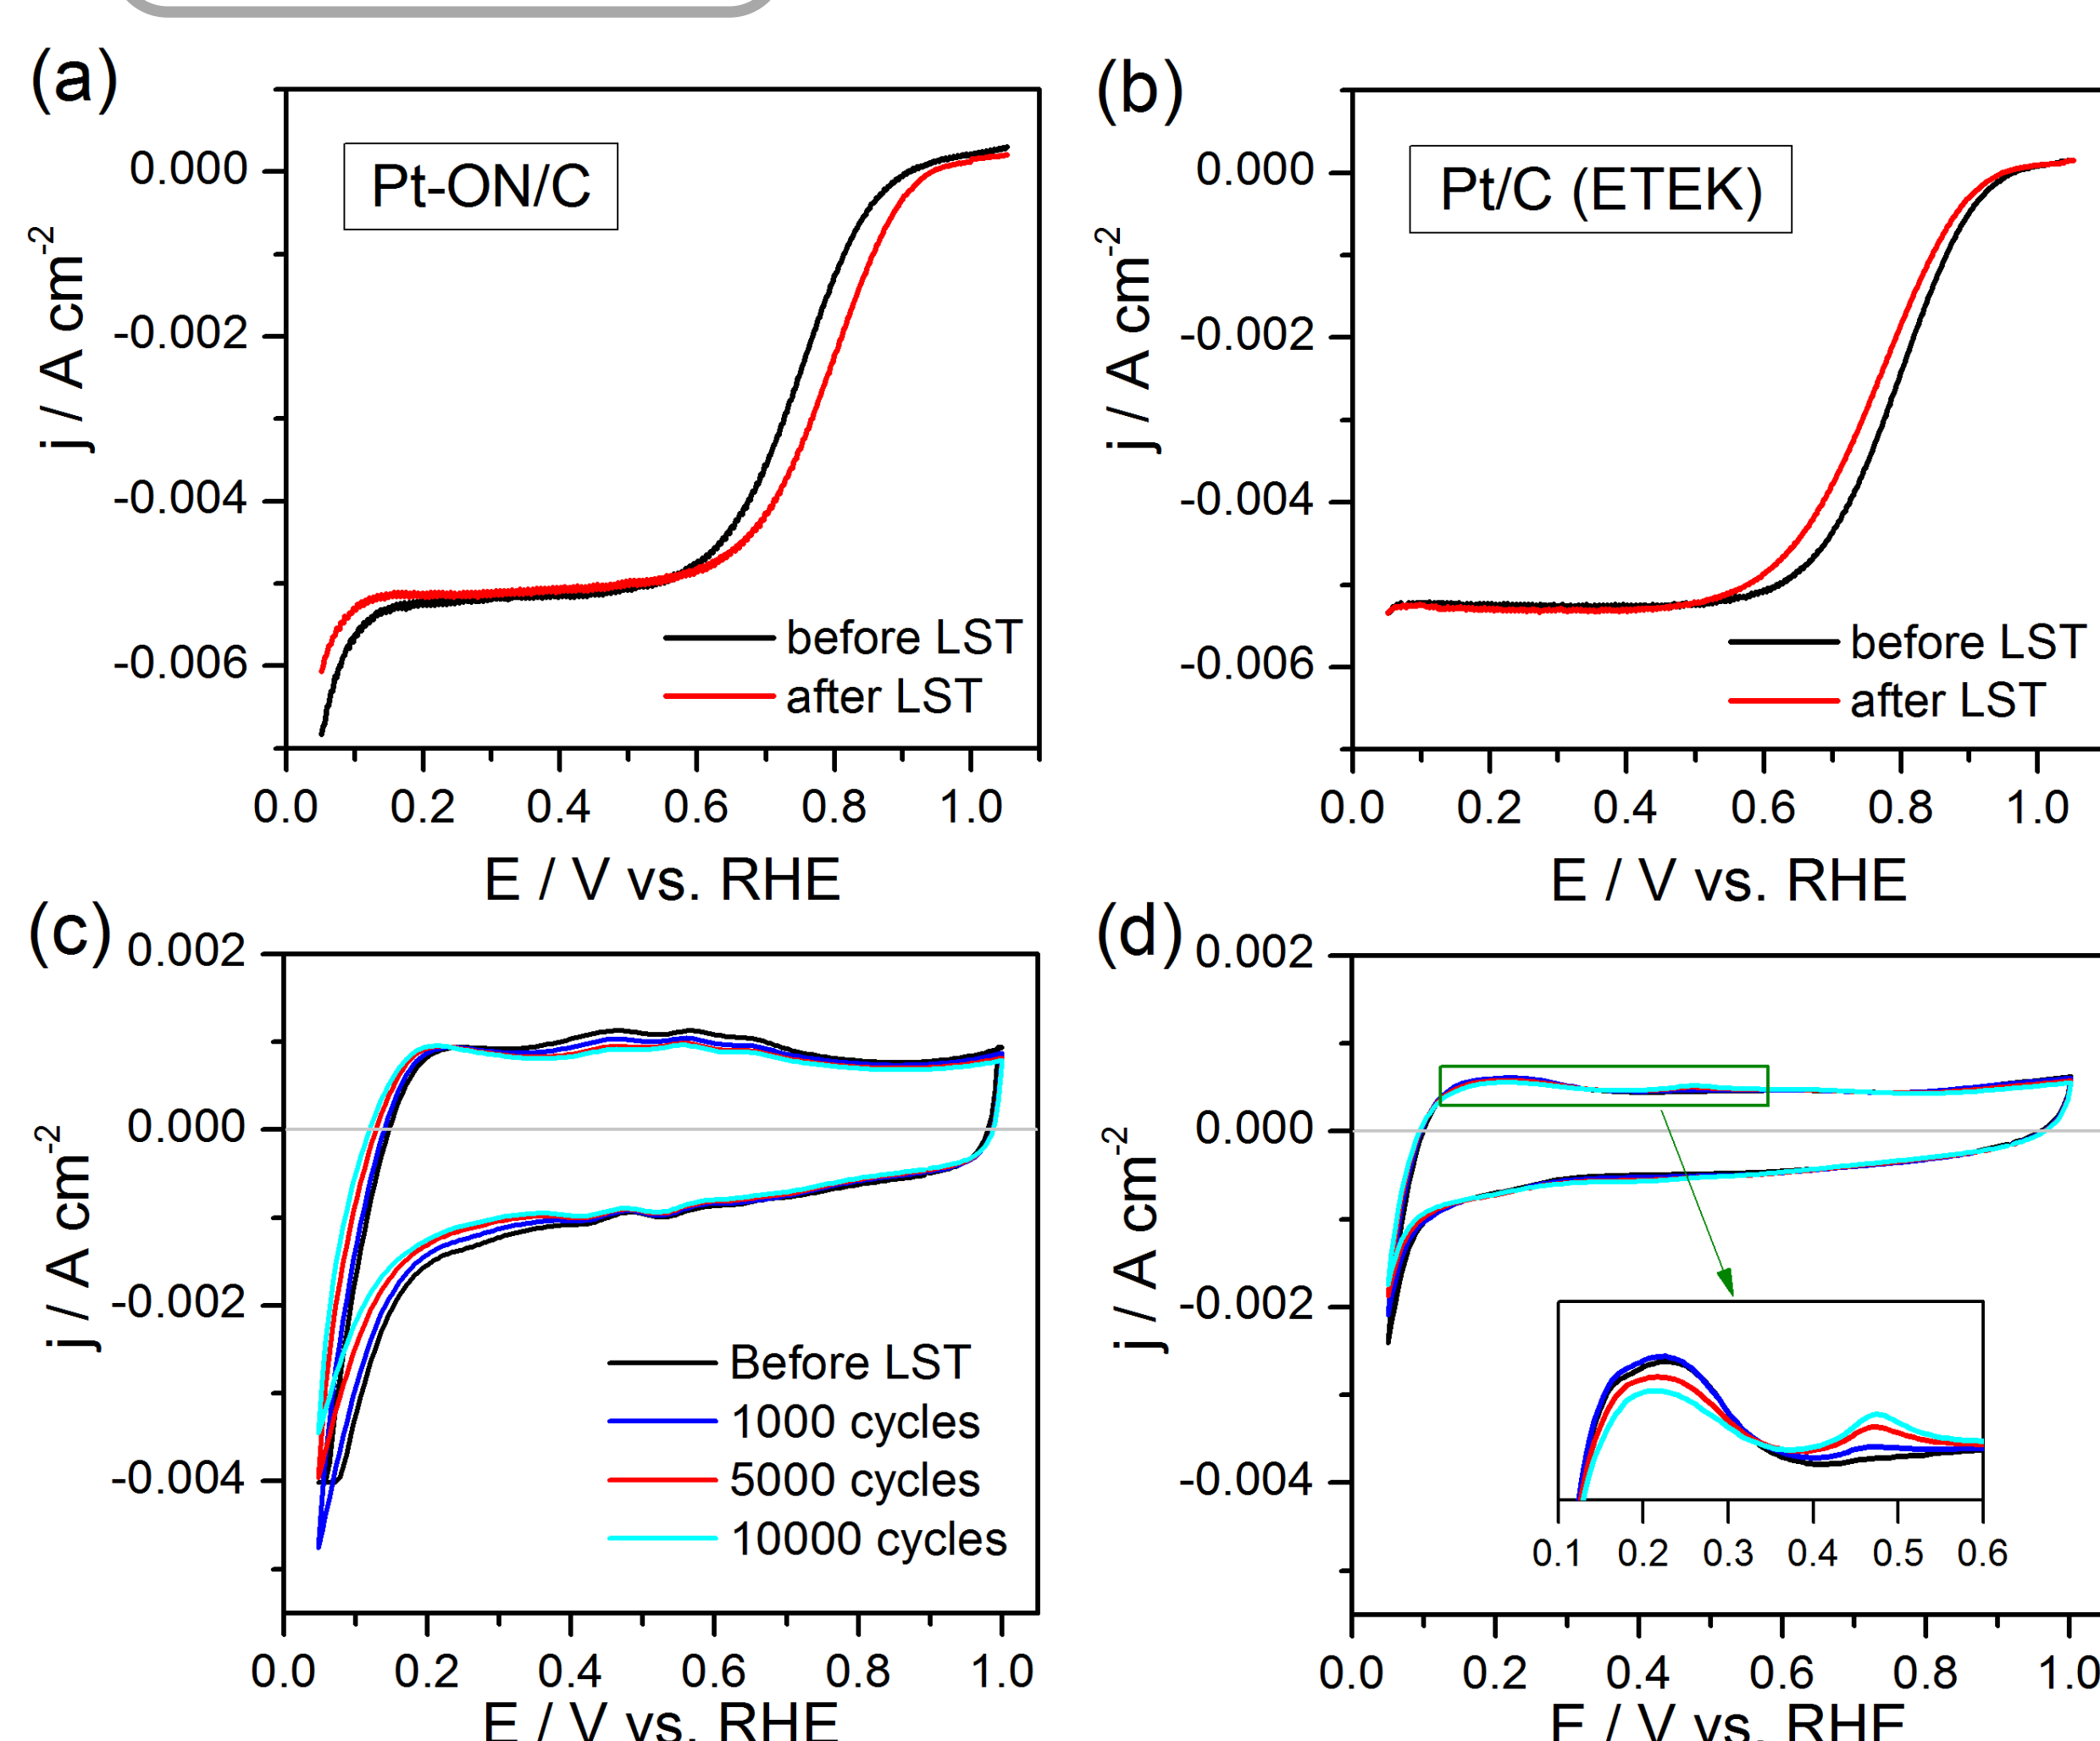


The activity of Pt-ON/C is improved after LST due to the Mo dissolution, while Pt/C (Etek) clearly degraded.

After SST, both catalysts lost the activity owing to Pt growth and carbon corrosion.

SST protocol

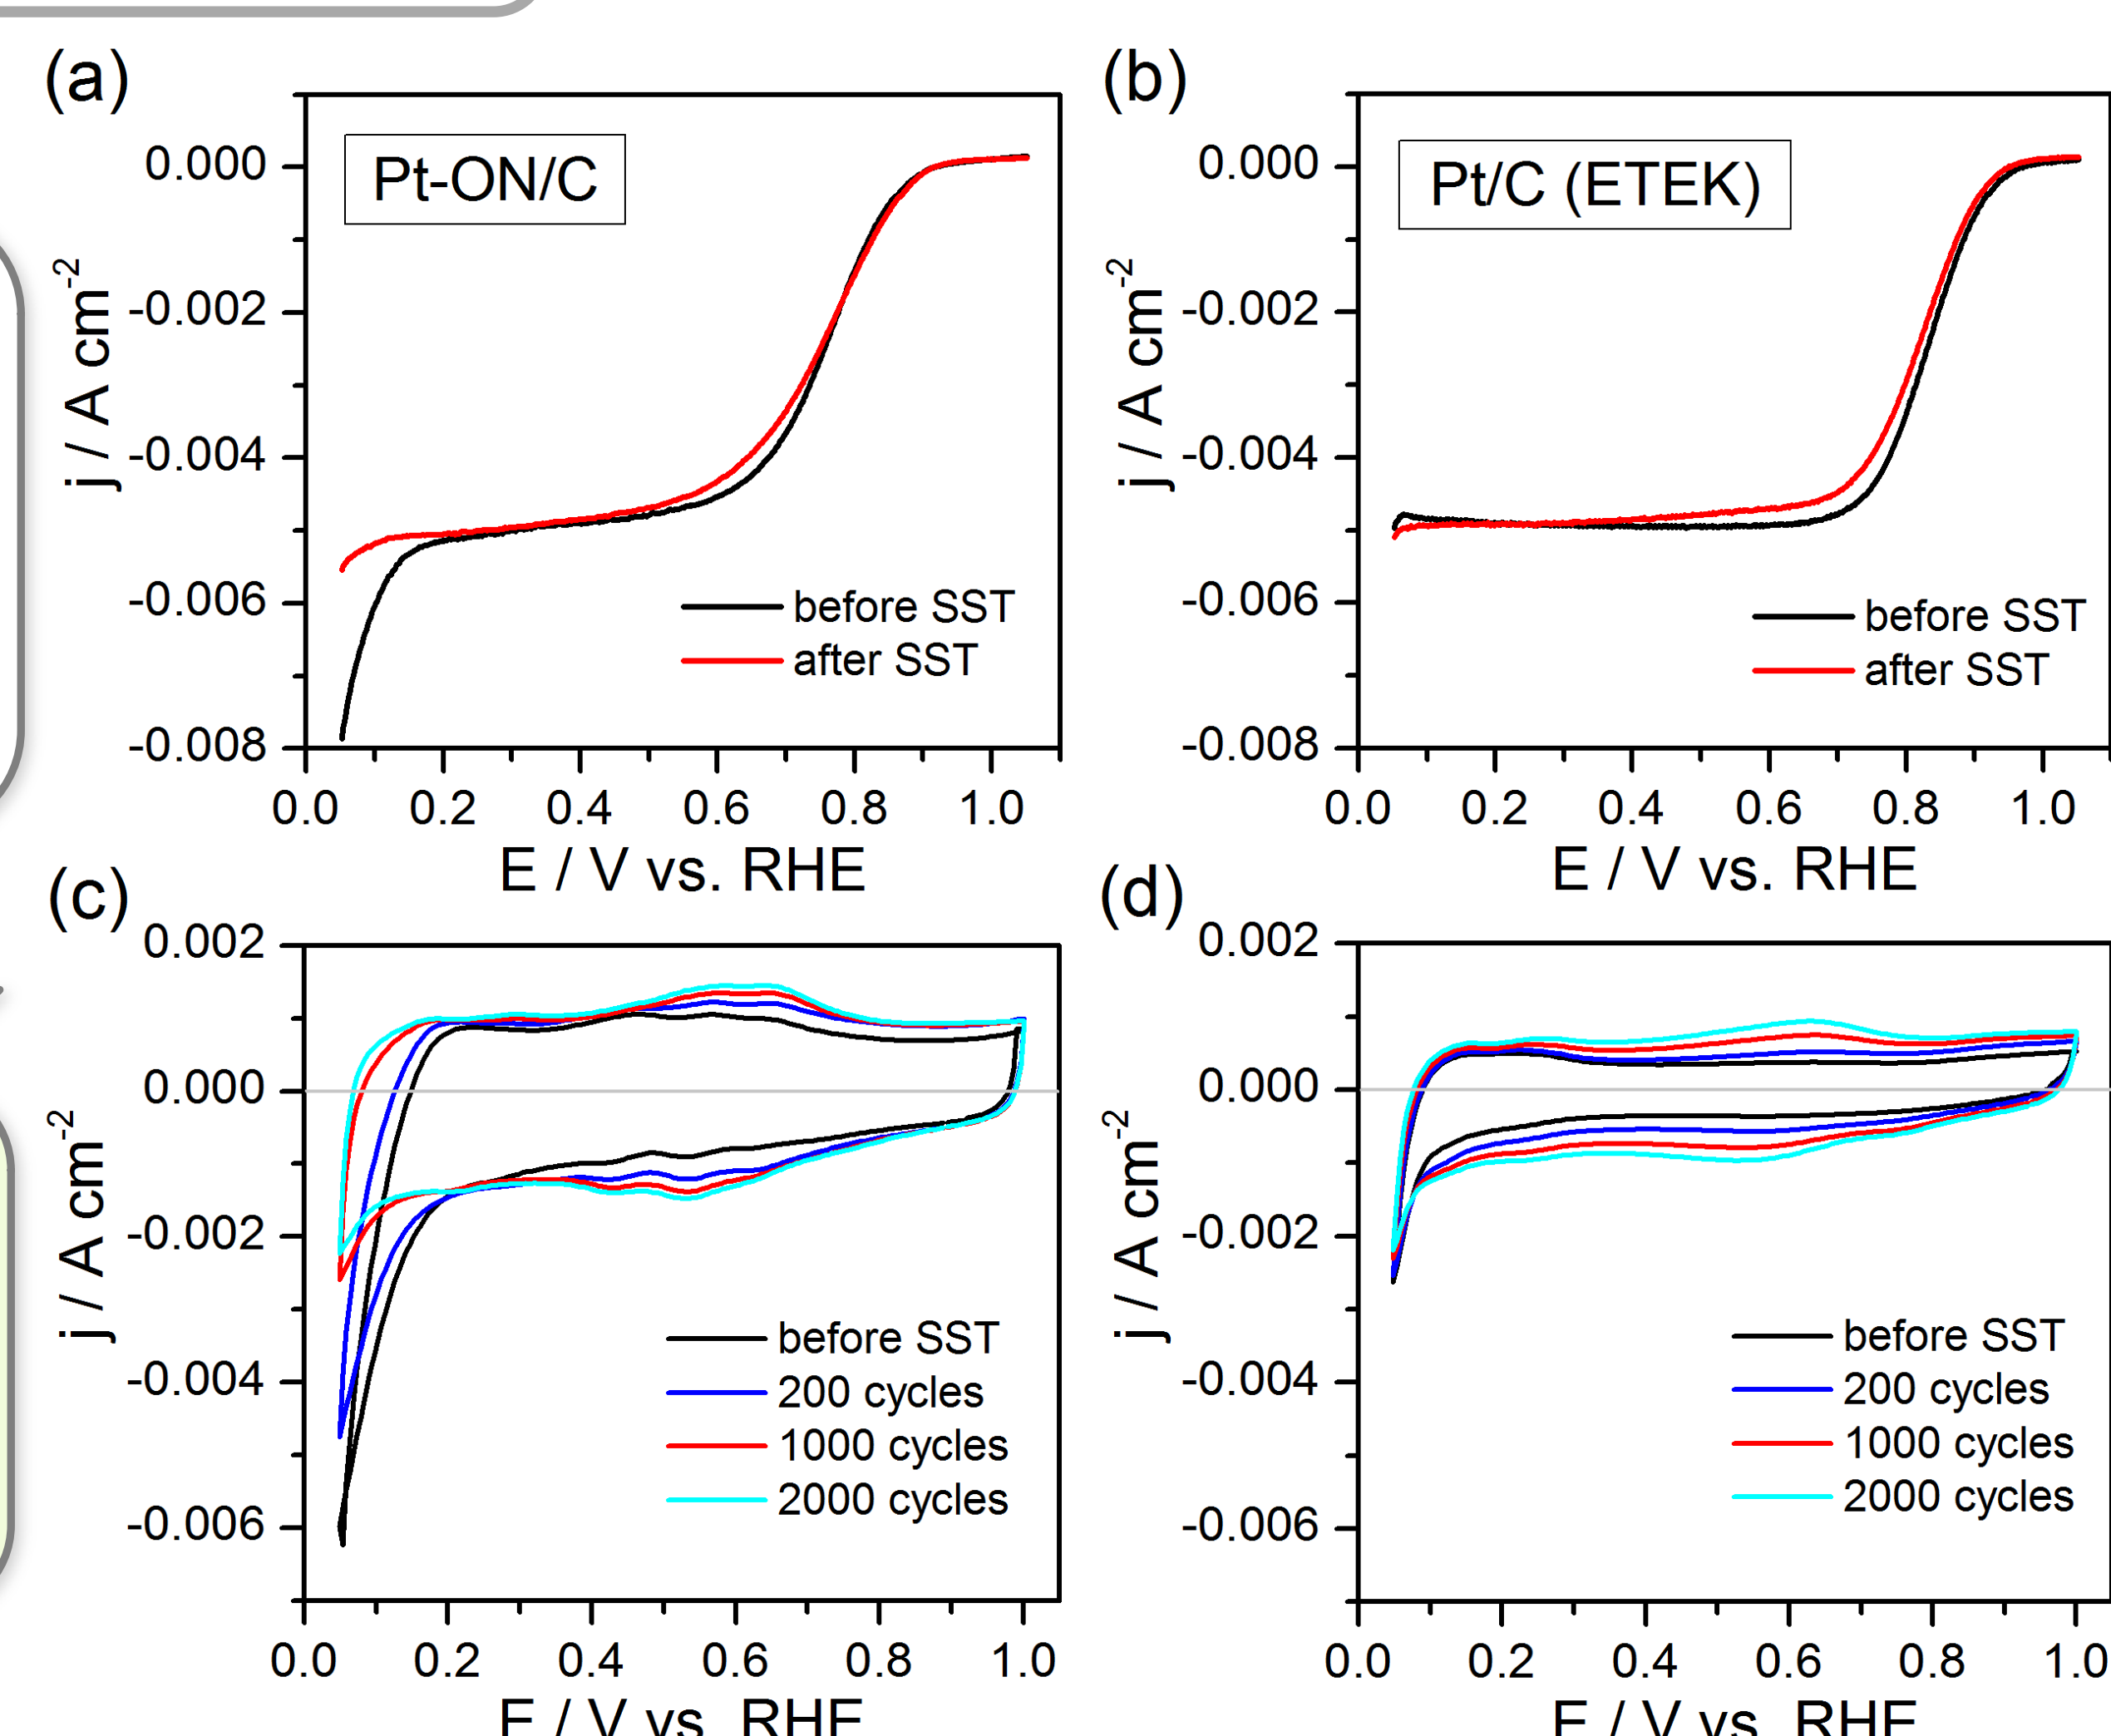


Pt growth

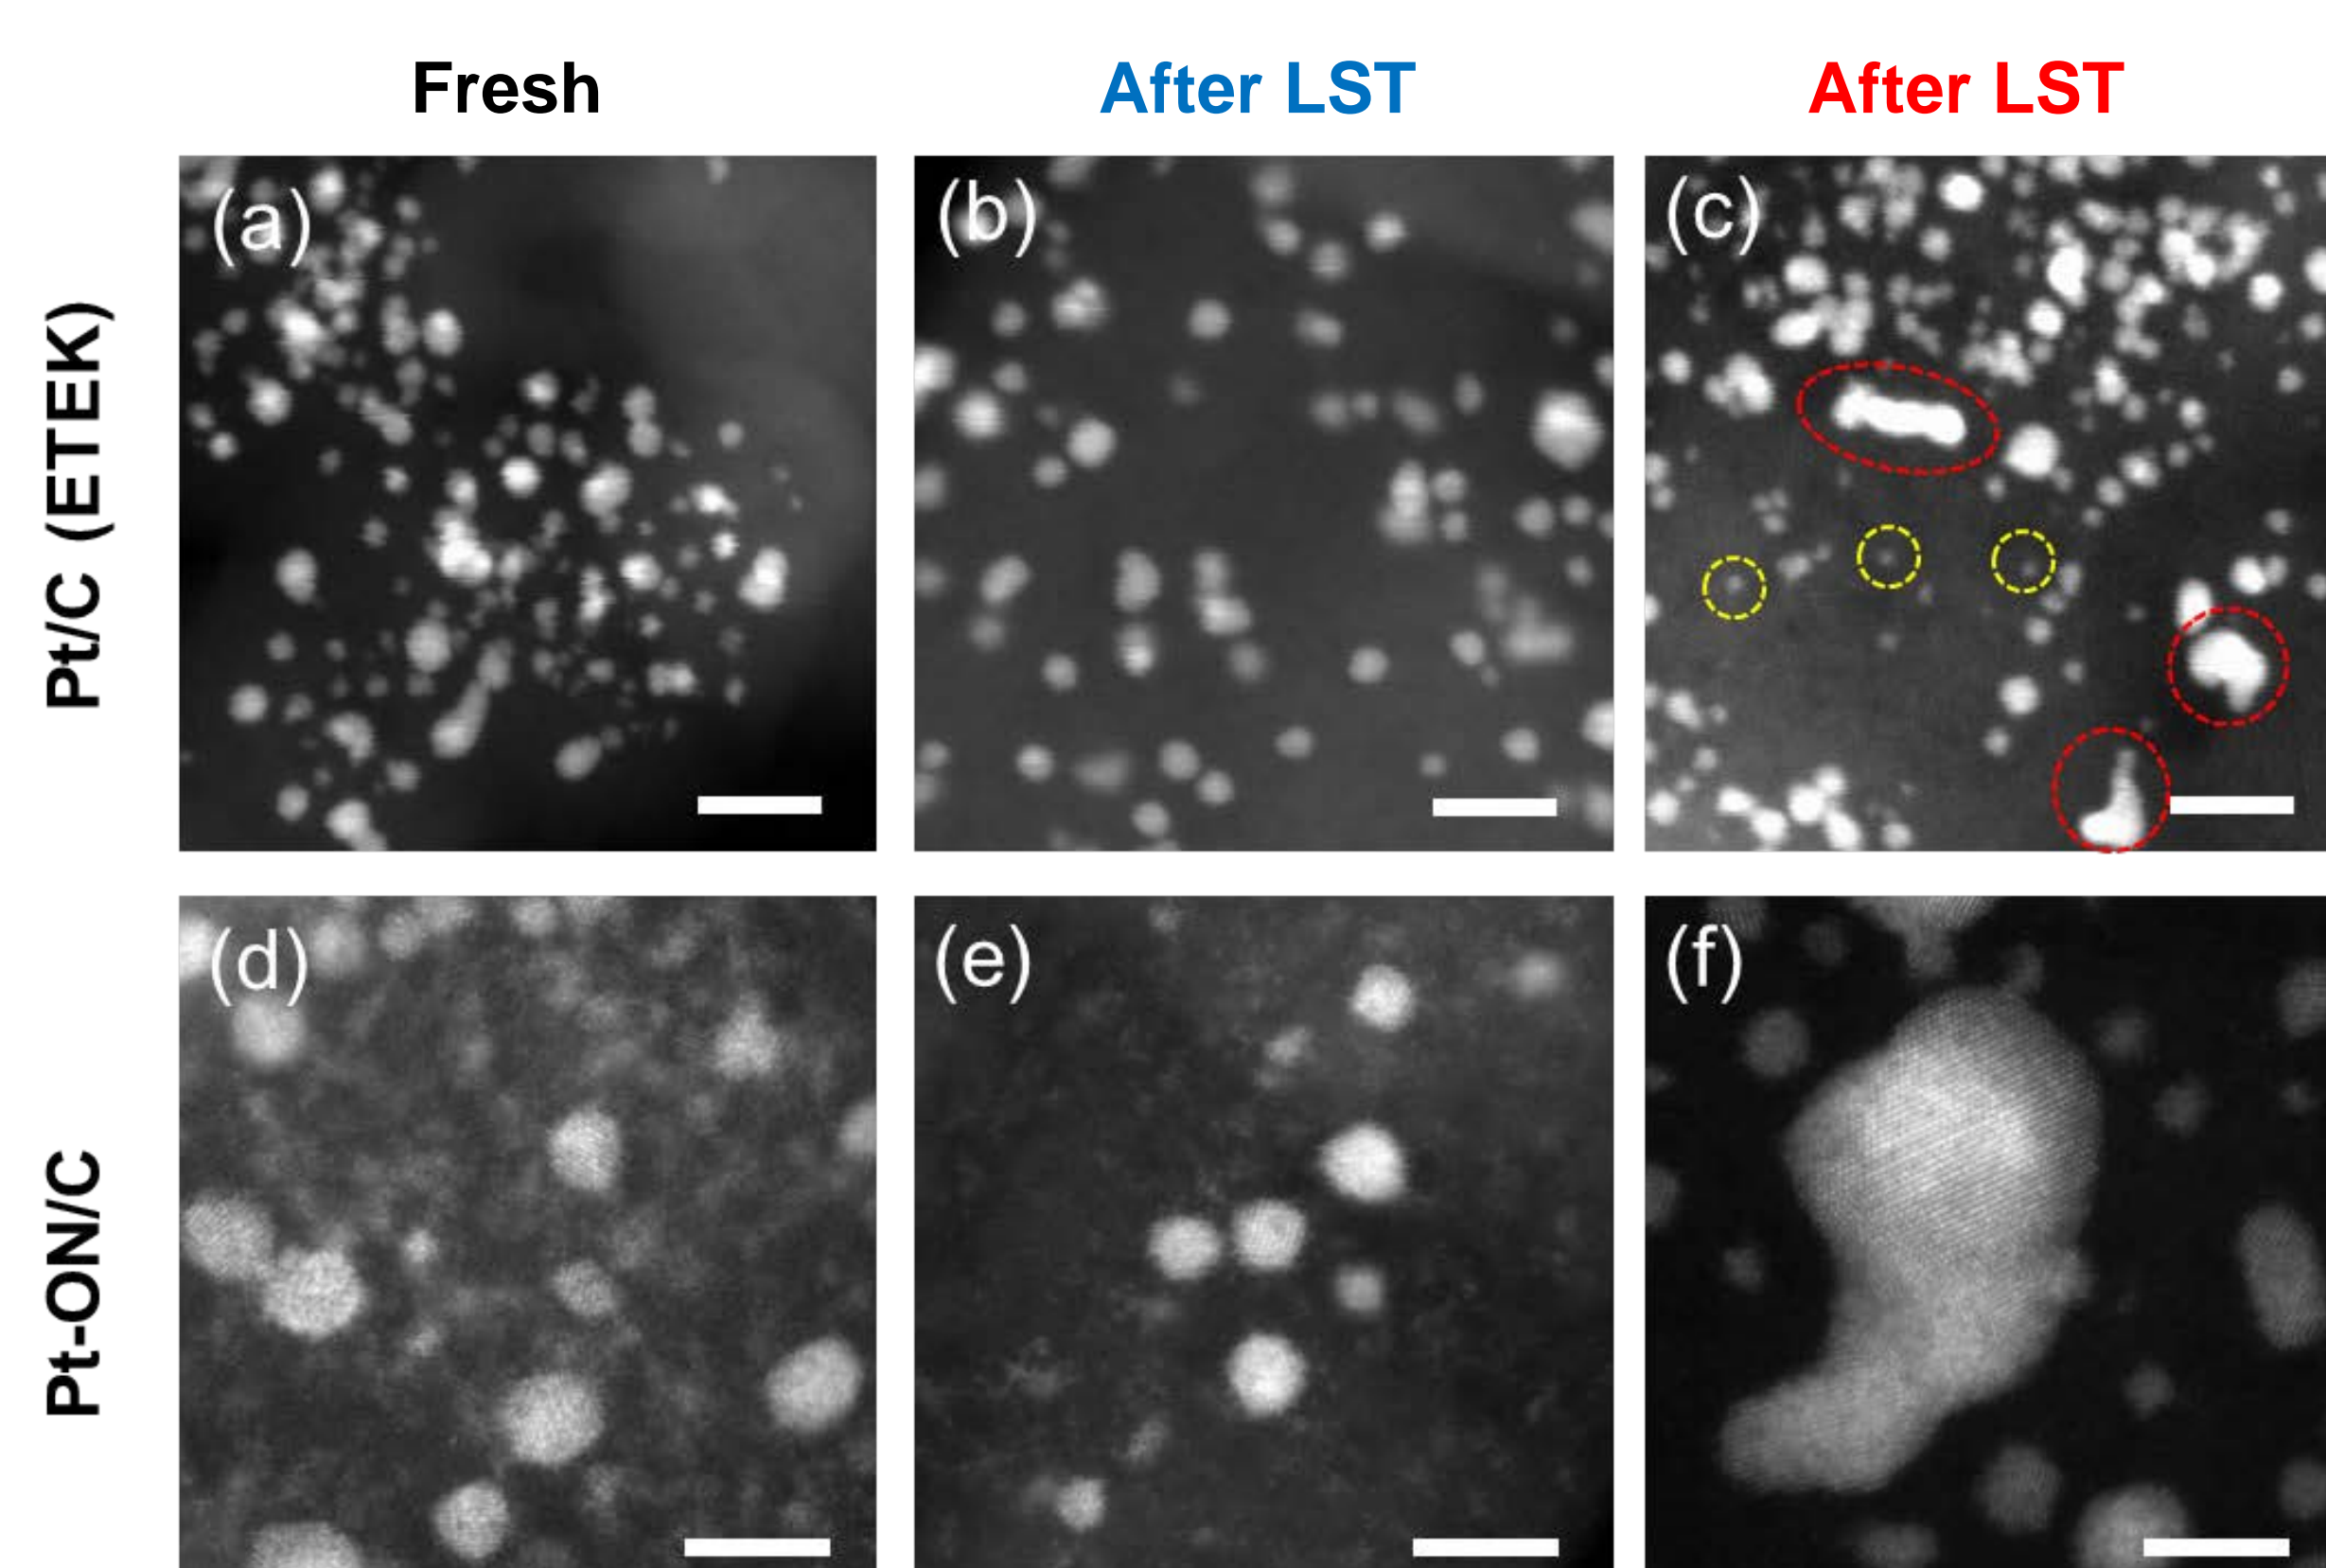

Pt growth is strongly potential dependent, and is only dominant for high potentials (up to 1.4 V).

Mo dissolution is observed in the sample of Pt-ON/C during the degradation test for all potentials.

Mo dissolution

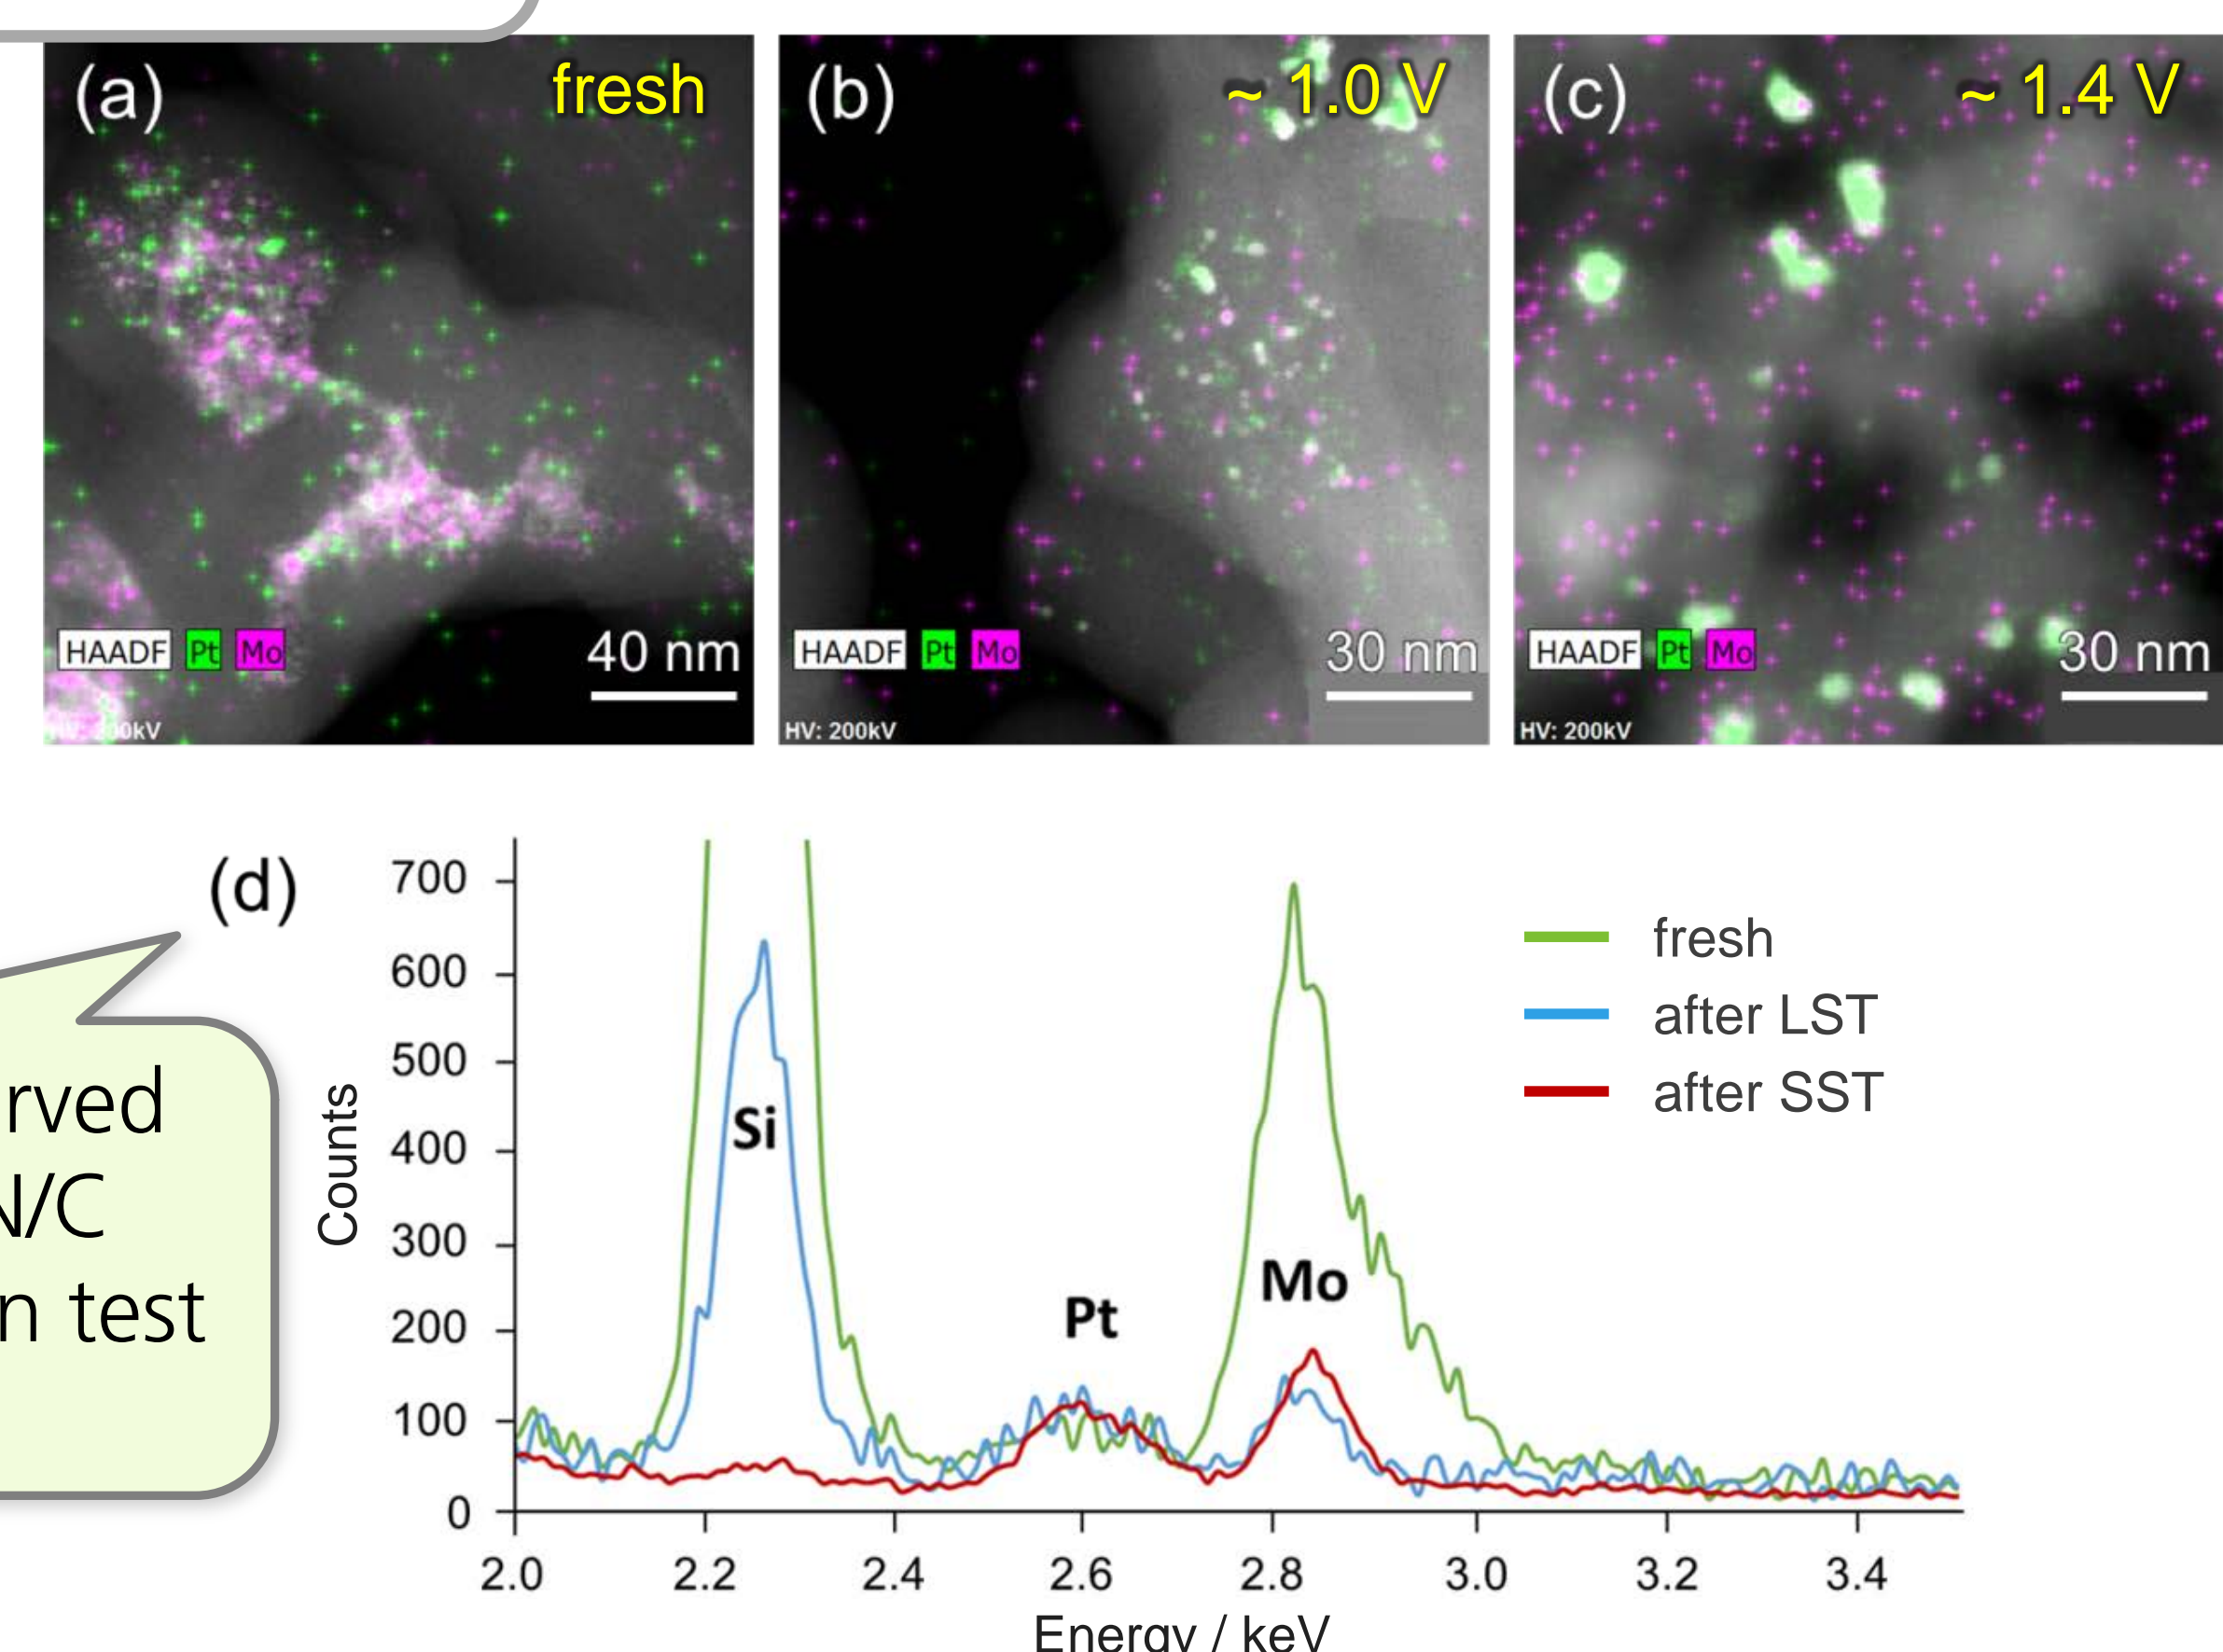

Acknowledgement: The authors are indebted to P. Wurster, P. Gazdzicki, D. G. Sanchez at DLR (Stuttgart) and L. Guétaz, P. A. Jacques from CEA (France). The research leading to these results has received funding from the European Union's Seventh Framework Programme (FP7/2007-2013) for Fuel Cell and Hydrogen Joint Technology Initiative under Grand No. 325239 (NanoCAT) and No. 621216 (SecondAct).



Deutsches Zentrum
für Luft- und Raumfahrt
German Aerospace Center

Knowledge for Tomorrow
Wissen für Morgen

